



TILTING QUICK COUPLER



WWW.GEITH.COM

GT QUICK COUPLER

Dramatically increase your productivity using the Geith Tilting Quick Coupler. Tilt your bucket or any attachment up to 180° with peace of mind.

FEATURES & BENEFITS

- Tilt any bucket or attachment up to 180 °
- Available for 2 - 27 ton excavators
- ISO13031 Compliant Quick Coupler
- No exposed cylinders
- Variable pin centre design
- Proven technology exceeds current safety standards
- Durable, compact design minimises tip radius extension
- Integrated cross port relief valve to protect the internal seals



**COMPACT DESIGN
MINIMISES TIP RADIUS EXTENSION**



TILT ANY ATTACHMENT UP TO 180°

SAFETY

- Front & Rear Safety Locks backed up by two powerful springs which retains the attachment rear pin in case of cylinder failure
- Powerful spring activated safety locks work in all dirty environments unlike gravity systems





VERSATILITY

- Dig level foundations without having to level the machine tracks
- Carry out landscaping with minimum disruption to the ground
- Reduce waste and manual labour when filling pea gravel around pipes and manholes
- Carry out rock breaking at the sides of deep trenches where standard couplers can't reach
- Expand the working envelope of the machine when hedge or brush cutting
- Tilt any of your attachments not just your grading bucket
- Ability to reverse buckets to allow the operator to excavate against walls and under pipes



**ISO 13031 COMPLIANT
QUICK COUPLER**

SPECIFICATIONS

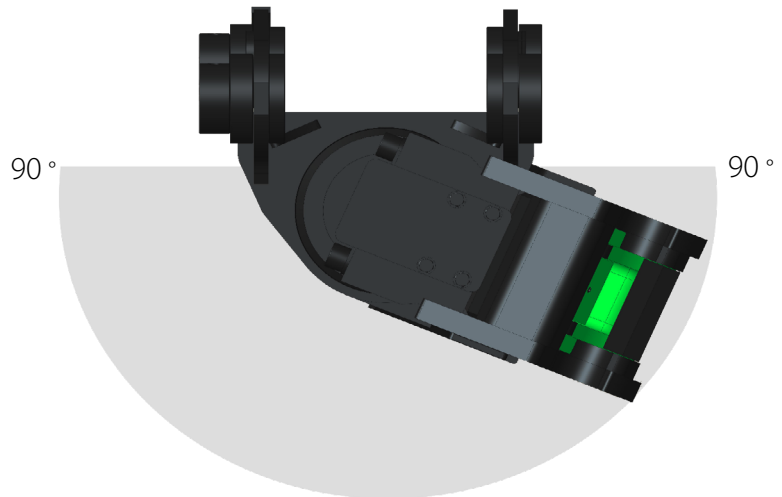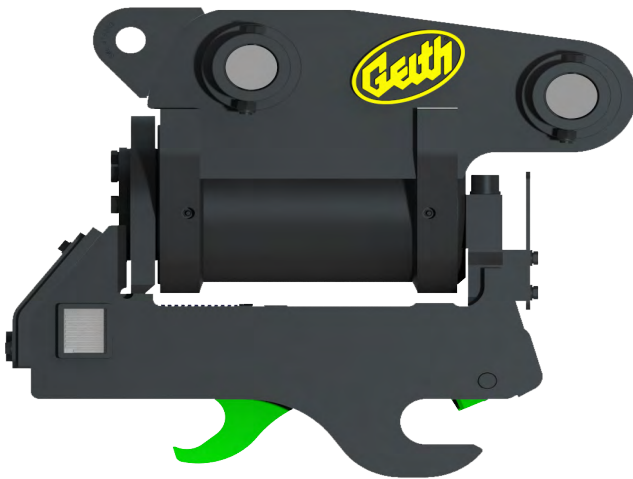

Model GT		GT05	GT07	GT10	GT14	GT23	GT27
Model QC		QC35-40	QC45	QC45	QC60	QC70	QC80
			QC50	QC50	QC65	QC80	QC90
				QC55			
				QC60			
Max. Machine Weight	kg	5,000	7000	10,000	14,000	23,000	27,000
	lb	11,000	15,400	22,000	30,900	50,700	59,500
Total tilt	°	180	180	180	134	134	134
Output Torque	Nm	2,800	4,700	7,300	10,500	14,000	18,000
	in lbf	24,782	41,599	64,610	92,933	123,910	159,313
Holding Torque	Nm	6,800	12,000	18,000	26,000	35,000	46,000
	in lbf	60,185	106,209	159,313	230,119	309,776	407,134
Approx Geith Tilting Quick Coupler Weight*	kg	99	153	208	326	592	747
	lb	218	337	459	719	1,305	1,647

CONTACT US

Ireland (HQ)

Block B, Swords Business Campus,
Swords, Co. Dublin

Tél. : +353 (0)1 650 2100

E-mail : marketing@geith.com

UK

Tel: +44 (0) 2039 361 232

Email : uksales@geith.com

France

Numéro vert : 0800 916 626

E-mail : frsales@geith.com

USA

Tel. : +1 800-762-4090

E-mail : ussales@geith.com

www.geith.com